


# merac


PEBBLE PLASTER

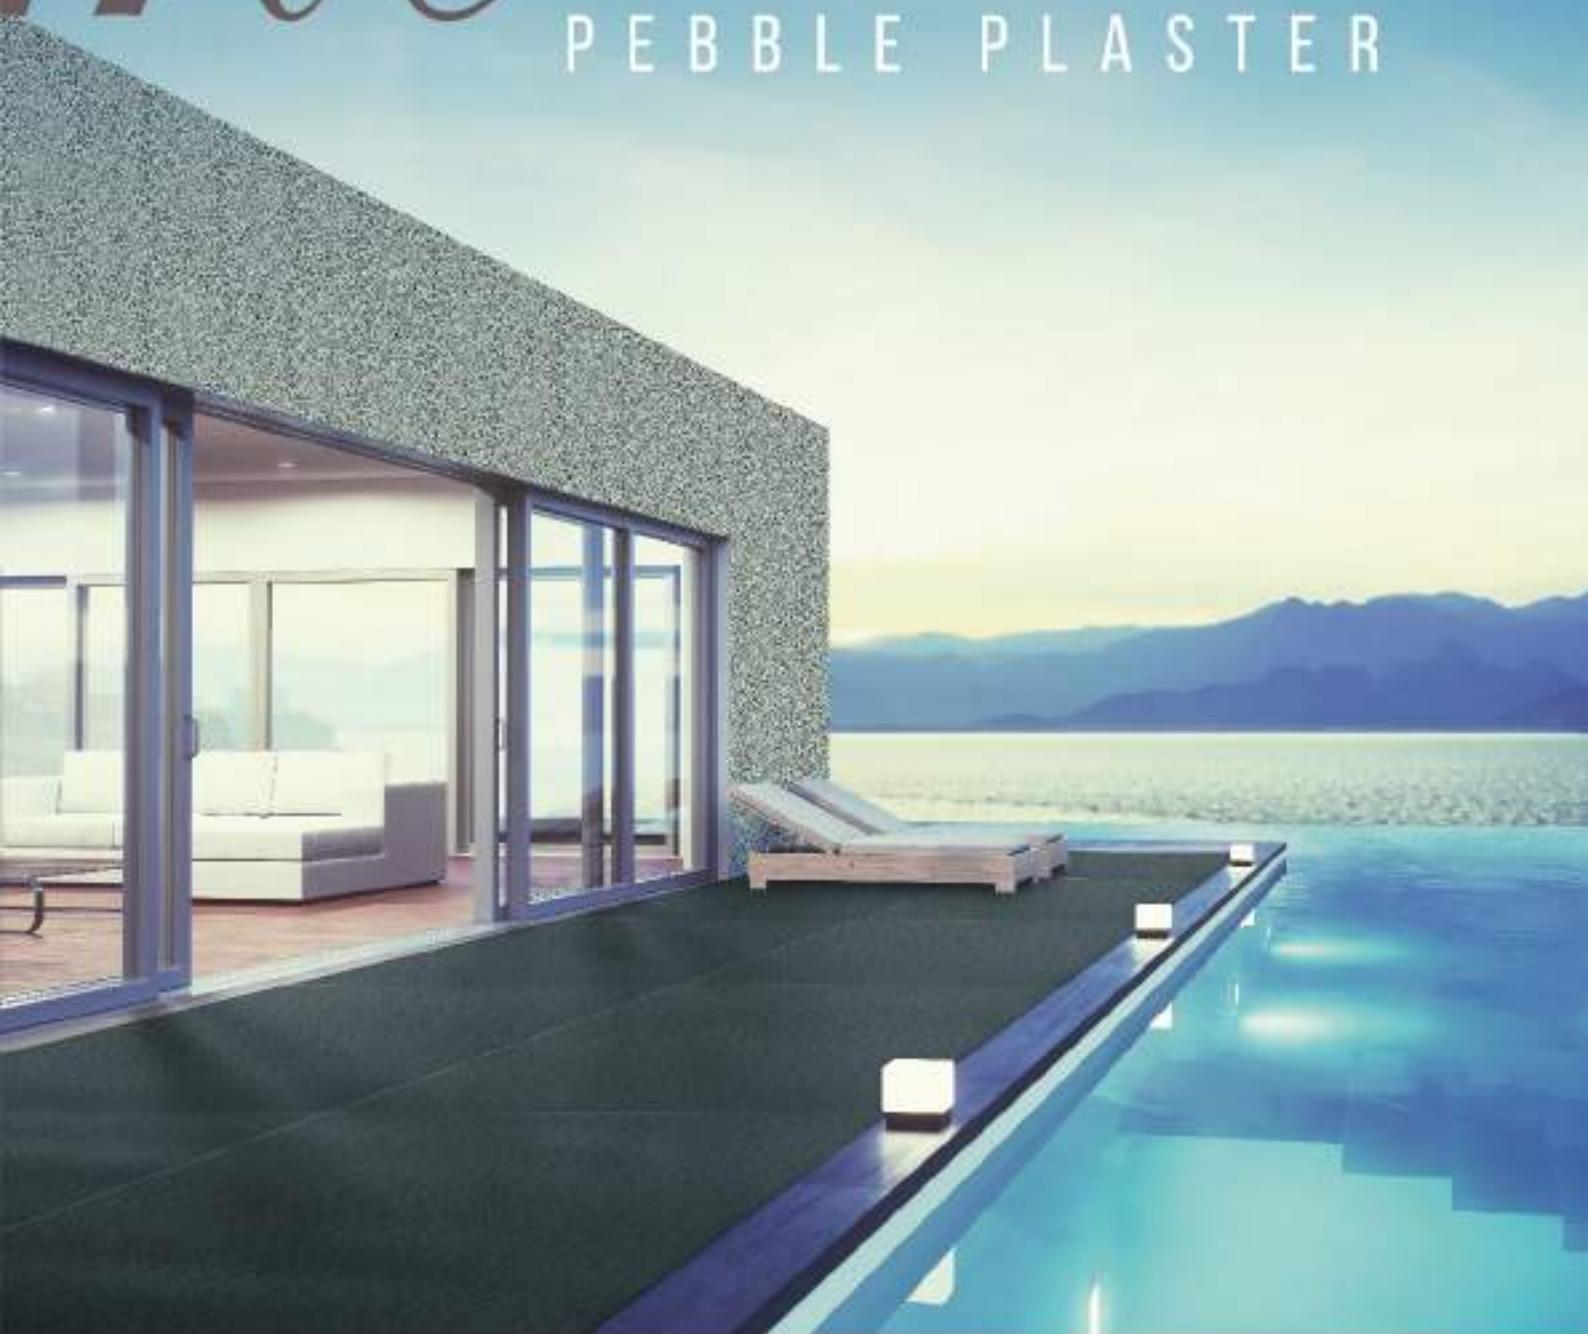

NEW COLOUR //

NUMEROUS CHOICE //

NATURE BEAUTY //

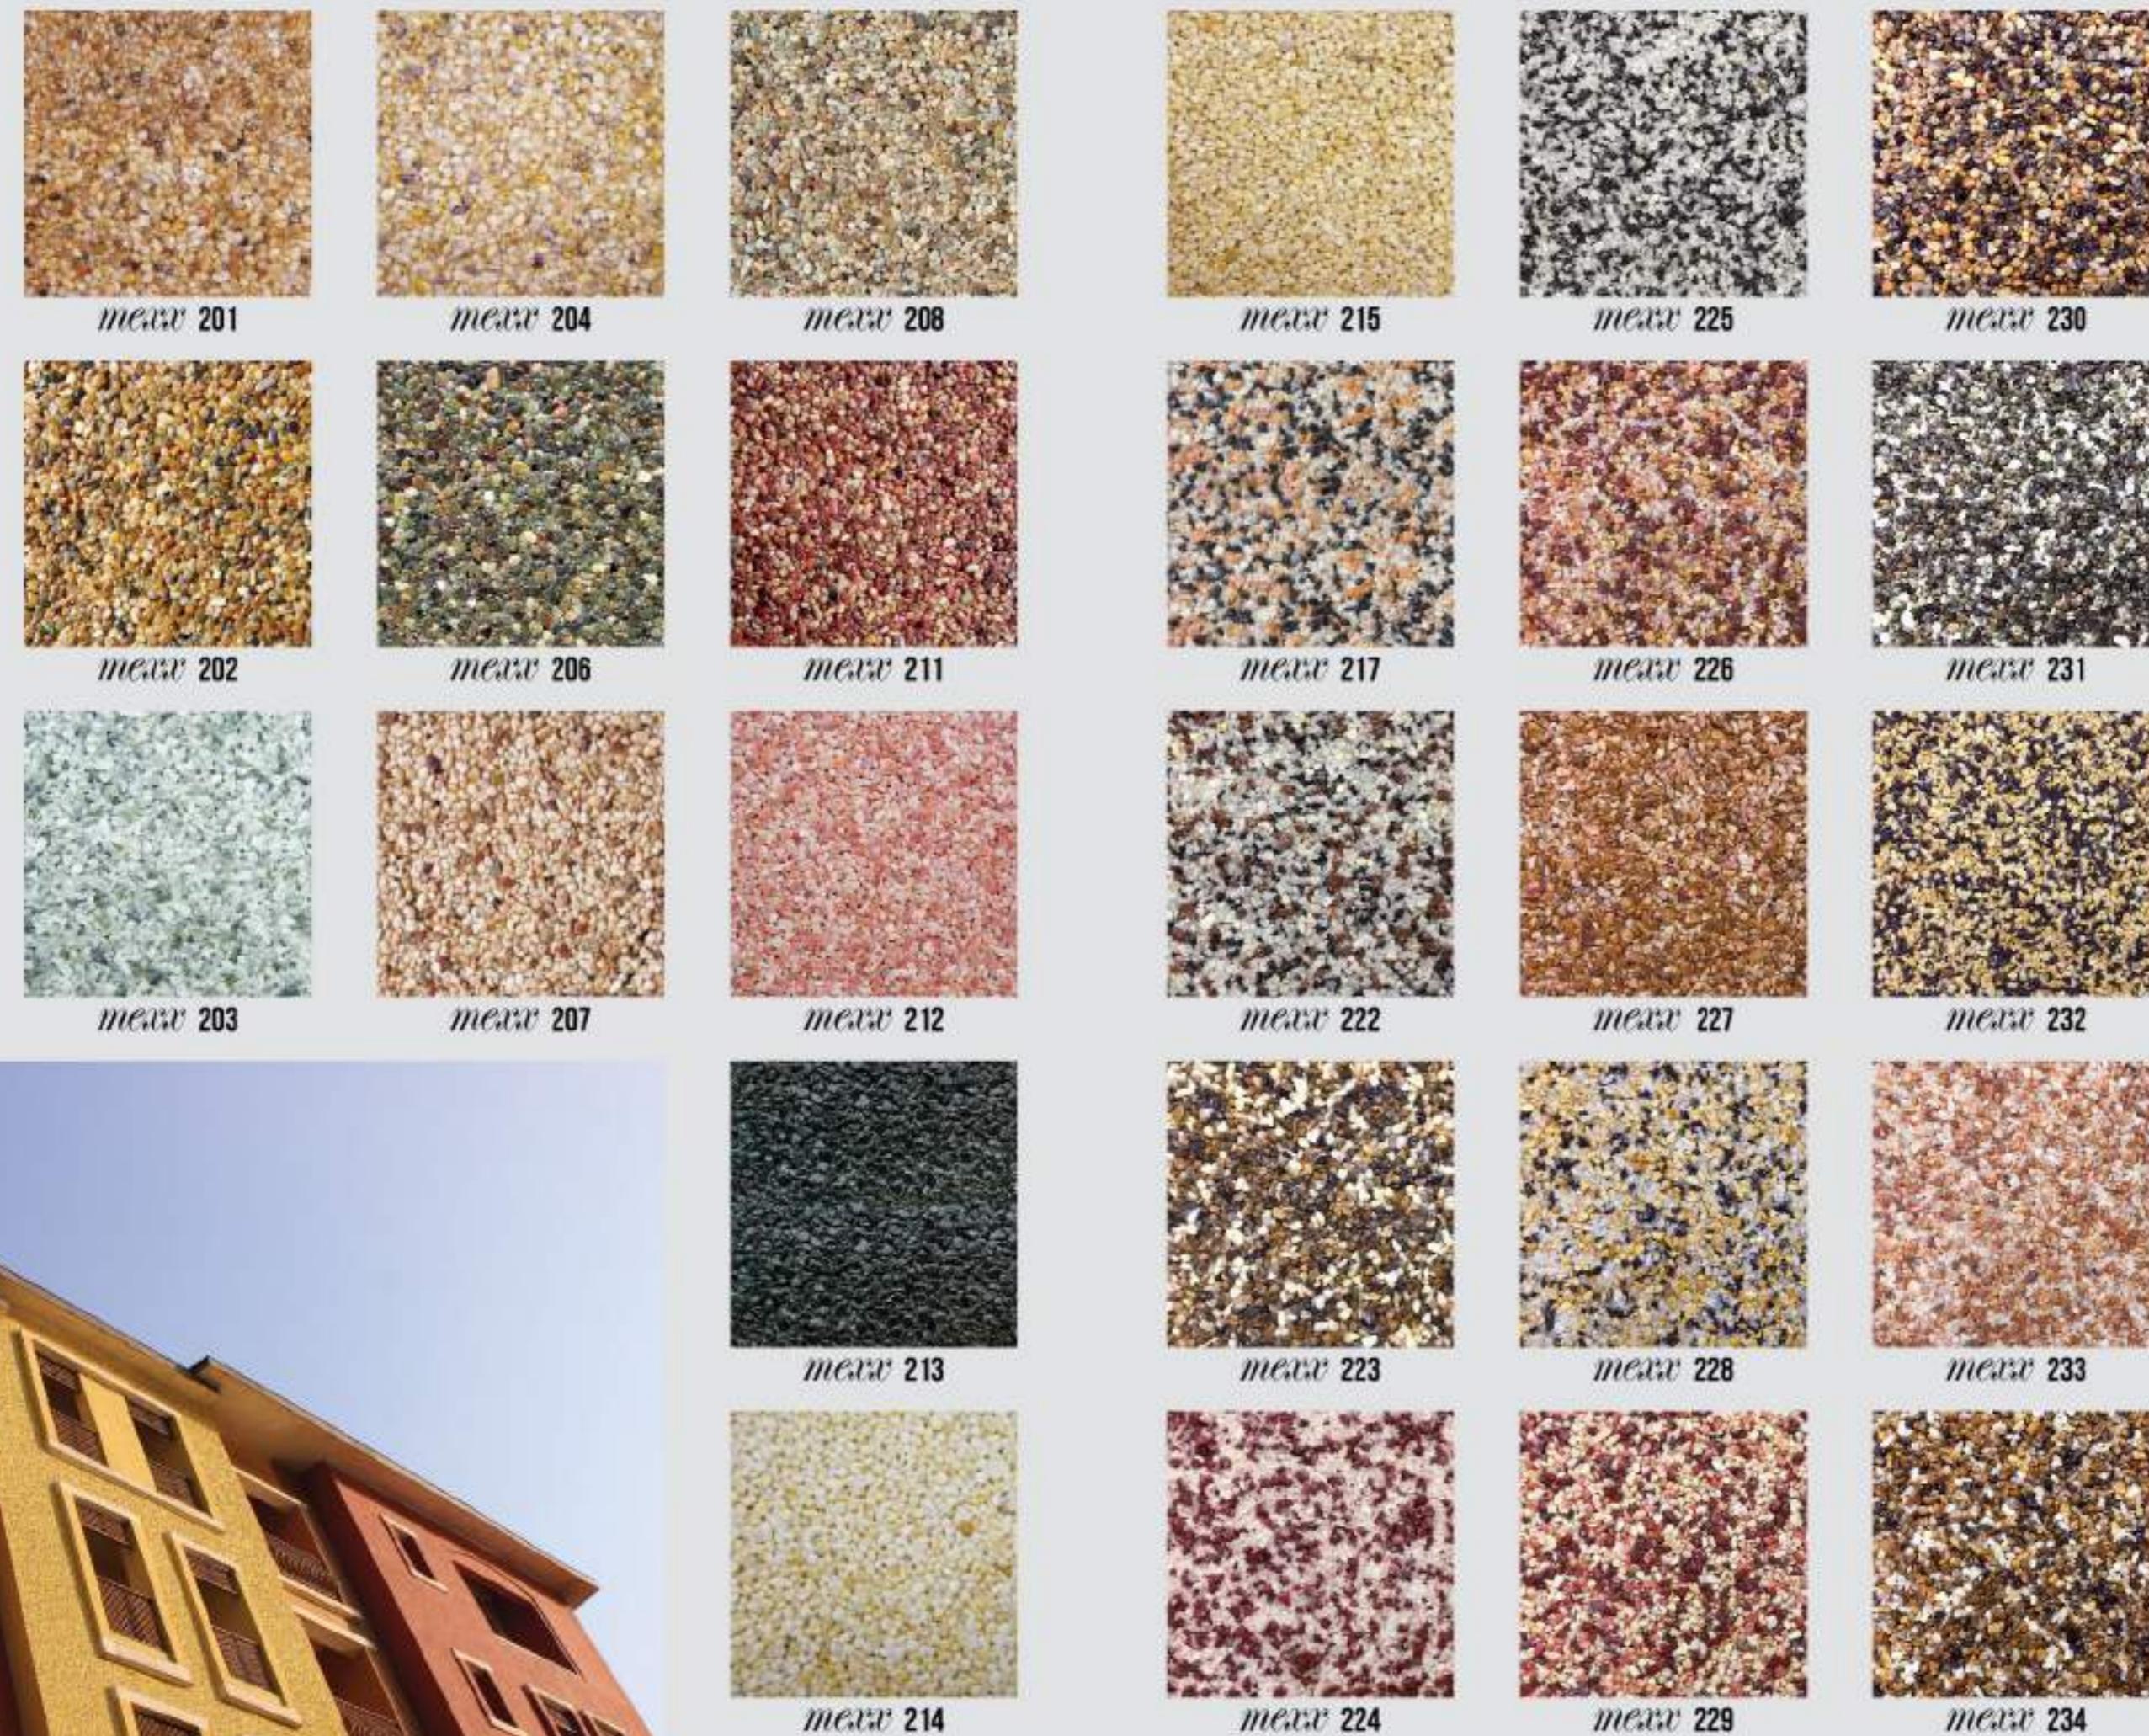

Product image shown for illustrative purposes only, please refer to the actual product samples prior to purchasing.



*mexx* 235



*mexx* 237



*mexx* 239



*mexx* 236



*mexx* 238



*mexx* 240

Product image shown for illustrative purposes only, please refer to the actual product samples prior to purchasing.

## Application | 安置程序



### Surface Preparation | 表面处理

- A suitable wall surface is required for better adhesion performances.
- 适当的墙面能让产品有更好的附着力。
- The designated wall surface must be moderately rough and dry.
- 墙面必须干燥和适度粗糙质感为佳。
- All surfaces must be free from the foreign objects.
- 所有表面必须无外来物体。
- For example: loose and peeling paints, oil, dirt, dust, grease and etc.
- 例如：松动或剥落的油漆，油垢，污垢，灰尘等都应当清除。



### Mixing Procedure | 材料混合步骤

- Prepare a clean container or use the pail of *MEXX* pebble plaster.
- 准备干净的容器或使用 *MEXX* pebble plaster 产品本身的手桶。
- Pour the *MEXX* adhesive in the pail with the natural stone.
- 将 *MEXX* 黏合剂倒入承载天然石材的手桶内。
- Mix the prepared *MEXX* adhesive and natural stone thoroughly and ensure all the stone are covered by the adhesive.
- 充分搅拌已经备好的黏合剂与石材，确保两者都被均匀搅和。
- Mixing process can be done by hand or with the mobility mixer operated manually.
- 搅拌过程可以手动方式搅拌，或选择以电动搅拌器代替。



### Installation | 安装

- Apply the prepared *MEXX* pebble plaster on the designated wall surface by using a clean plastering trowel.
- 用干净的涂料泥刀把搅和好的 *MEXX* pebble plaster 均匀涂抹在指定的施工墙面上。
- Apply the *MEXX* pebble plaster evenly with a plastering trowel to control the product thickness ( $\pm 7\text{mm}$ ) and smoothness.
- 运用涂料泥刀把材料抹平以确保成品达到理想的厚度( $\pm 7\text{mm}$ )及平整度。



### Curing Time | 凝固

- When the entire surface covered with *MEXX* pebble plaster, it takes 2 days to completely dry.
- 完成后的 *MEXX* pebble plaster 表层需要两天时间凝固。
- During the period, do not expose the surface to any water and recommended to cover with plastic or waterproof material.
- 切记在表层完全凝固之前不能沾水。建议以塑料或防水材料覆盖。



### Sealer Gloss or Matt (Optional) | 光或亚光面漆

- After the surface has completely dry, user can apply one to two layers of sealer gloss or matt.
- 当表层充分干透及凝固后，可以涂上透明面漆。
- Sealer is meant to protect the surface against the dirt or grease and show the beauty of natural stone.
- 面漆的主要目的是为了保护表面以免受污垢或尘埃的侵蚀，也能展现天然石材之美。



### Caution | 注意

- It is advisable to purchase an accurate amount to ensure color consistency.
- 建议购买准确的用量以确保颜色的一致性。